

STAGEMAKER®

manual chain hoist



 **VERLINDE®**
LIFTING EQUIPMENT

STAGEMAKER Europe - VERLINDE - 2, boulevard de l'Industrie - B.P. 20059 - 28509 Vernouillet cedex - France
Telephone :+33 (0)2 37 38 95 95 - Fax :+33 (0)2 37 38 95 99
Web site : www.stagemaker.com - E-mail : contact1@stagemaker.com

STAGEMAKER®

manuel chain hoist



capacity 500 to 1 000 kg

- Load wheel and reduction gears are machined to ensure smoother and more efficient operation during hoisting.
- Standard hoisting height : 10/15/20 meters (other heights available on request) The actuating chain is 50 centimetres shorter than the lifting chain.
- Category 80 high strength alloy steel lifting chain with galvanised finish to ensure good resistance to corrosion (in compliance with standard EN 818, safety factor 4).
- The compact design of the hoist ensures small size and low weight. This hoist is ideal for lifting small structure (banners, store sign panels, small truss, ...).
- The steel cover provides rugged protection for the mechanical parts (Load wheel, gears).
- Black paint finish.
- The upper and lower hooks are in heat-treated alloy steel with safety pawls.



Options

- Chain bag with capacity of 20 meters of chain, complete with handle for carrying the hoist

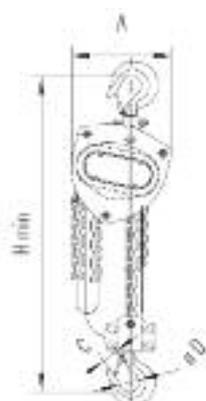

Load (kg)	Lifting height (m)	Lifting chaine		Force on actuating chain (kg)	Net weight (kg)	Dimensions				
		Number of strands	Ø x pitch			A (m m)	B (mm)	C (mm)	D (mm)	H min (mm)
500	10/15/20	1	5x15	24	11	148	132	23	35	345
1000	10/15/20	1	6x18	25	12.5	172	151	27	40	376

for more informations

If you need more informations concerning this new system, please consult us at contact1@verlinde.com. We will organize a demo.

To locate distributor in your country, please consult : www.stagemaker.com