

# PAP

## Girder Clamp



Model 1 ton



Model 2 tons



Model 3 tons



Model 5 tons



**VERLINDE**

2, boulevard de l'Industrie - B.P. 59 - 28501 Vernouillet cedex - France  
Phone: (33-02) 37.38.95.95 - Fax: (33-02) 37.38.95.99

JV0396 93 UGB

# PAP

## Girder


### Principal Characteristics of the Girder Clamps.

- High strength steel construction.
- Epoxy painting.
- Adjustable to profil types IPN, IPE, H,...
- Without load carrying welds, the load is evenly
- Security screw to block

### Types of Utilisation for Girder Clamps.

- Fixed directly to a lifting device.
- Lifting girders,...

### Technical Information.

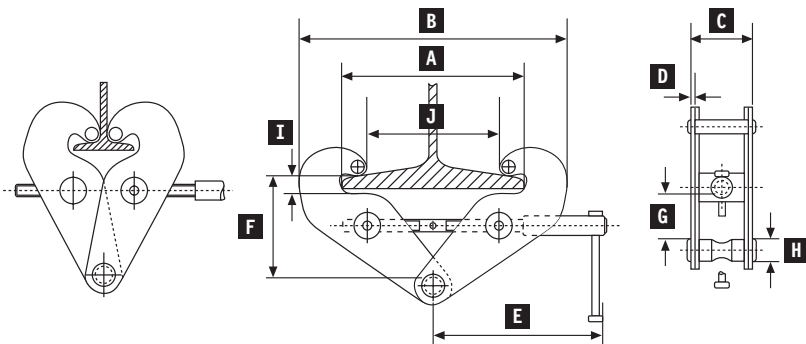

Model	Capacity in kg	Rail width in mm	Net weight in kg
PAP1	1000	75-230	3,9
PAP2	2000	75-230	5
PAP3	3000	80-320	9,5
PAP5	5000	90-310	11,3

Model	Dimensions in mm											
	A max.	B max.	B min.	C	D	E	F max.	F min.	G min.	H	I	J
PAP1	240	192	340	70	5	210	150	45	45	20	20	185
PAP2	240	192	340	78	6	210	150	45	45	20	20	185
PAP3	316	238	445	106	8	250	207	165	76	22	34	261
PAP5	306	248	455	114	10	250	210	167	76	28	34	251

Verlinde reserves the right to modify or improve its equipment as described in this leaflet and to supply equipment which differs from the illustrations and specifications given.



